

Mexodus Range

The **Mexodus** range of high quality LED exit sign luminaires is perfectly suited to modern architectural environments. Offering ease of installation, these exit sign luminaires have an attractive flat design with the exit legend being framed by a high quality aluminium extrusion measuring just 237 x 137mm.

The specially screened light-conducting panel ensures a uniform illumination and due to their high luminance of >500cd/m² are ideal for use in brightly lit environments.

Along with their slim design and four different mounting options, **Mexodus** luminaires are DALI addressable and offer countless possibilities for the seamless integration of lumen efficient exit signage into existing structures and new installations.

OPERATION

The **Mexodus** Exit range is supplied with Maintained operation as standard providing 3 hour duration. (Non-maintained operation is available by excluding a switched live supply).

The luminaire fully complies to the requirements of EN60598.2.22 and offers bright and even luminance across the legend panel ensuring maximum visibility in the event of an emergency.

DALI and Self-Test

As standard the **Mexodus** functions as a stand-alone Self-Test exit sign or can be connected to a DALI system and can also be configured for non-maintained, maintained or switched maintained operation.



ME/WIRE/DALI/WH



ME/RECE/DALI/WH



ME/WBRK/DALI/WH



GENERAL DETAILS

Product	LED Exit Sign (DALI/Self-Test)
Light Source	10 x white LEDs
Luminaire output	Sign luminance >500cd/m ²
Sign viewing distance	20m
Construction	Steel and aluminium base with screen printed opal Polycarbonate legend panel
Geartray	N/A
Dimensions	See drawings

Emergency Lighting Products Limited
Parbrook House, Cillmans Industrial Estate,
Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601
Fax: +44 (0) 1403 786602
e-mail: sales@elp.uk.com


Safe in the knowledge
elp.uk.com




Mexodus Range

SPECIFICATION


	Maintained	Mains only
Light source	10 x wide angle white LEDs	
Colour temperature	4500K	
IP rating	IP20	
Ambient temperature (Ta)	0°C - 25°C	
Insulation class	Class I	
Supply voltage	230V ~ 50Hz	
Supply power	4.3W	2.4W
Charge power (typical)	1.7W	—
Battery	6.4V 1.5Ah LiFePO4	—
Weight	3.6kg	3.2kg

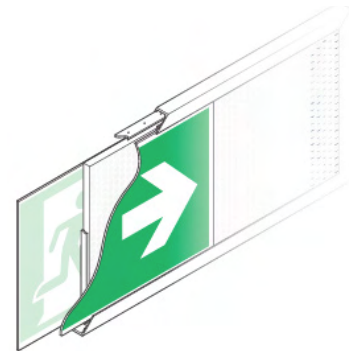


Exit legends can be easily changed without the need for tools.

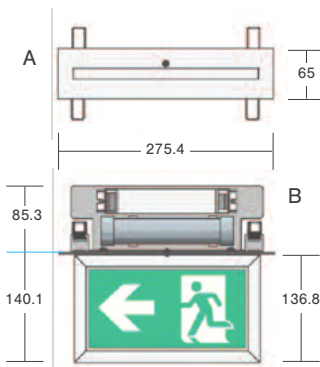

ME/RECE/DALI/WH

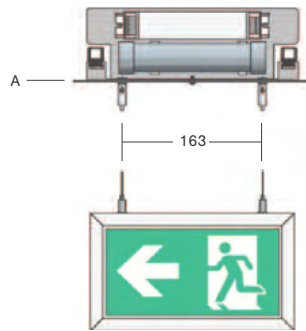

ME/WIRE/DALI/WH

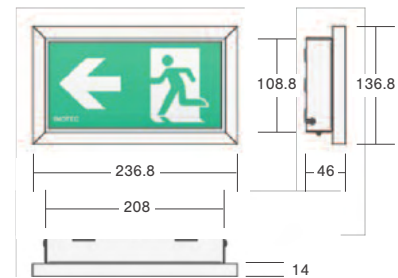

ME/WBRK/DALI/WH

NOTE: All high mounted versions share a common fixing plate 'A' and recessed gear tray 'B'. Wire lengths are adjustable to 1 metre.

ORDER CODES

Description

ME/WBRK/DALI/WH	Wall mounted 3-hour maintained DALI emergency exit sign, white
ME/RECE/DALI/WH	Recessed mounted 3-hour maintained DALI emergency exit sign, white
ME/WIRE/DALI/WH	Wire suspended 3-hour maintained DALI emergency exit sign, white

OPTIONS:	/DS	Double sided
LEGENDS:	/ECAR	EC Format – Arrow Right
	/ECAL	EC Format – Arrow Left
	/ECAD	EC Format – Arrow Down
	/ISOAR	ISO Format – Arrow Right
	/ISOAL	ISO Format – Arrow Left
	/ISOAU	ISO Format – Arrow Up
	/ISOAD	ISO Format – Arrow Down

NB: Other housing colours available to special order.

Emergency Lighting Products Limited
Parbrook House, Cillmans Industrial Estate,
Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601
Fax: +44 (0) 1403 786602
e-mail: sales@elp.uk.com

Safe in the knowledge
elp.uk.com