

LDE3F and LDCK330/40

Where projects require the advantages of low energy/long life LEDs packaged in standard downlight products for plasterboard ceilings and ceiling tiles the **LDE3F** range is the ideal choice.

The **LDE3F** downlights (white or black thermally conductive plastic) are installed using spring clips into a 45mm diameter cut-out.

The **LDE3F** range can be supplied with the **LDCK330/40** in-line emergency driver kit which can pass through the cut-out into the ceiling void (minimum void depth 175mm).

LDE3F/W (WIDE BEAM)

The **LDE3F/W** downlight offers a Wide beam (160 degree) lens configuration ideal for illumination of open areas with mounting heights of typically 2 to 5m.

LDE3F/C ('CORRIDOR' BEAM)

The **LDE3F/C** downlight offers a dissymmetric lens providing a narrow beam across the width of a corridor and extremely wide (batwing) distribution along the length of the corridor.

LDE3F/HL (HIGH LEVEL / MEDIUM BEAM)

The **LDE3F/HL** downlight offers a medium beam ideal for higher mounting heights of typically 6 to 12m or lighting high risk tasks.


NB: it is often an advantage to use higher operating currents for this lens – See *Power Supplies in LDE3F and LD13/18 Data Sheet*.

The 'standard' emergency driver pack is the **LDCK330/40**. This comprises a one piece housing for the emergency driver and high temperature NiCd battery and easily passes through the cut-out required to mount the **LDE3F**.

When the normal mains supply fails the **LDCK330/40** powers the **LDE3F** downlight for 3 hours. The **LDCK330/40** has Class II insulation, an Extra Low Voltage output and features double insulated wires to the downlight to provide additional mechanical protection.



LDE3F/WID/D/WH
White Downlight

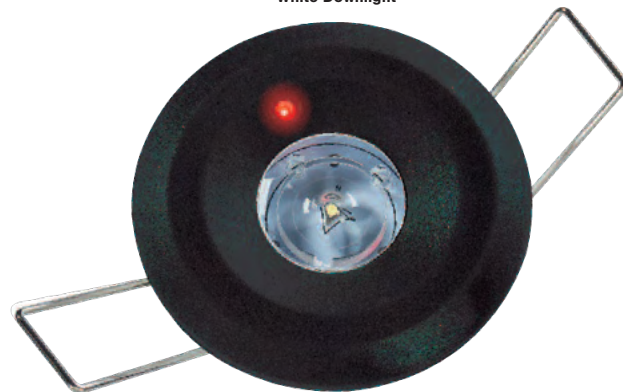

LDE3F/WID/D/BL
Black Downlight
(DALI red 'fault' indication)



LDCK330/40 complete kit with
LDE3F/WID/D/WH White Downlight

Emergency Lighting Products Limited
Parbrook House, Gillmans Industrial Estate,
Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601
Fax: +44 (0) 1403 786602
e-mail: sales@elp.uk.com


Safe in the knowledge
elp.uk.com

Miniature Downlight and In-line Emergency Kit

LDE3F and LDCK330/40

SPECIFICATION

Non-maintained	
Light source	Nichia white LED
Colour temperature	4500K
Lumens (emergency)	150lm @ 350mA
IP rating	IP42 (front)
Ambient temperature (Ta)	0°C to 40°C
Insulation class	Class II
Supply voltage	230V ~ 50Hz
Supply power	1.5W
Battery	1x 2.4V 1.8Ah NiCd
Dimensions	260mm(L) x 32mm(W) x 35mm(H)
Minimum void depth	175mm

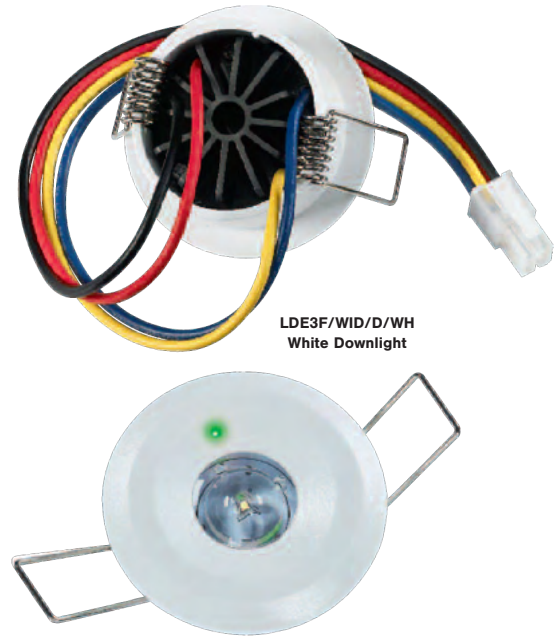

Typical Emergency Lighting Spacings - LDE3F Downlights connected to LDCK330/40 emergency driver pack

Mounting height Hm (m)	LDE3F/W @ 350mA		LDE3F/C @ 350mA		LDE3F/HL @ 350mA	
	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape
	2.0	10.0	8.9	n/a	11.9	n/a
2.5	9.6	8.2	n/a	12.9	n/a	n/a
3.0	9.0	7.5	n/a	13.1	n/a	n/a
3.5	8.5	6.8	n/a	13.4	n/a	n/a
4.0	7.9	4.8	n/a	13.5	n/a	n/a
6.0	6.4	4.5	n/a	12.2	5.8	n/a
8.0	n/a	n/a	n/a	7.9	7.3	n/a
10.0	n/a	n/a	n/a	n/a	8.5	n/a
12.0	n/a	n/a	n/a	n/a	9.6	n/a

NB: Full .LDT photometry files available upon request

Notes (LDE3F/HL):

10.76Lux achieved at Hm=5m

15.00Lux achieved at Hm=4m

ORDER CODES

Description

LDCK330/40/WW	Emergency driver pack with Wide beam downlight; White body
LDCK330/40/CW	Emergency driver pack with Corridor beam downlight; White body
LDCK330/40/HW	Emergency driver pack with High Level (medium) beam downlight; White body
LDCK330/40/WB	Emergency driver pack with Wide beam downlight; Black body
LDCK330/40/CB	Emergency driver pack with Corridor beam downlight; Black body
LDCK330/40/HB	Emergency driver pack with High Level (medium) beam downlight; Black body

NB: Suitable for intermittent operation.

Emergency Lighting Products Limited
Parbrook House, Cillmans Industrial Estate,
Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601
Fax: +44 (0) 1403 786602
e-mail: sales@elp.uk.com

Safe in the knowledge
elp.uk.com