

Aviator-HO

Supplied with an IP65 rated off-white polycarbonate base and attractive polycarbonate fresnel lens, **Aviator-HO** luminaires provide 800 lumen output as standard, with the fresnel lens creating cost effective opportunities to minimise the number of luminaires required within an installation.

Aviator-HO luminaires can be surface mounted or semi-recessed and are ideal for exterior and industrial applications where higher illuminance levels are required.

OPERATION

The **Aviator-HO** luminaires are available with mains only or Non-Maintained emergency operation. All emergency versions provide 3 hour duration from integral Nickel Cadmium (NiCd) batteries.

The luminaires fully comply to the requirements of EN60598.2.22

DALI/Self-Test Options:

The **Aviator-HO** luminaires can be specified with integral DALI/Self-Test gear providing automatic Self-Test in accordance with BSEN62034 or fully interoperable DALI operation when connected to a DALI control system.

NOTE: Aviator-HO luminaires can be equipped with SurePath BLE Bluetooth addressable Gateway modules.
[See Data Sheet.](#)



GENERAL DETAILS

Product	IP65 rated Bulkhead
Light source	2 x LED strip PCBs
Luminaire Lumens	800lm (emergency)
Construction	Off-white polycarbonate base and clear fresnel lens
Geartray	Hinged white painted steel
Dimensions	350mm (L) x 120mm (W) x 90mm (H)
Cable entry	20mm entries in back and ends



AV/HO/NM3



AV/HO/230

Emergency Lighting Products Limited
Parbrook House, Cillmans Industrial Estate,
Natts Lane Billingshurst, West Sussex RH14 9EZ


Telephone: +44 (0) 1403 786601
Fax: +44 (0) 1403 786602
e-mail: sales@elp.uk.com

Safe in the knowledge
elp.uk.com

Aviator-HO LED

SPECIFICATION

	Non-Maintained	Mains only
Light source	2 x LED strip PCBs	
Colour temperature	4500K	
Luminaire lumens (mains)	–	800lm
Luminaire lumens (emergency)	800lm	–
IP rating	IP65	
Ambient temperature (Ta)	0°C to 25°C	
Insulation class	Class II	
Supply voltage	230V +/- 10% ~ 50Hz	
Supply current	25mA	40mA
Supply power (mains)	5W	8W
Charge power (typical)	4W	–
Battery	7.2V 3.0Ah NiCd	–
Weight	1.4kg	1.0kg

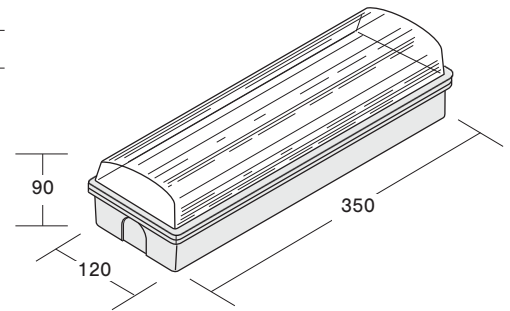

AVIATOR-HO – Emergency Lighting Spacings

Mounting height Hm (m)	Trans. to wall	Trans. to trans.	Axial to trans.	Axial to axial	Axial to wall	
2.5	5.0	11.4	10.1	9.5	4.1	1 Lux min. at centre
4.0	7.9	16.6	14.9	15.1	5.9	
8.0	10.6	20.1	18.6	19.9	8.8	
10.0	8.8	19.5	18.1	18.4	6.6	
12.0	7.3	15.8	14.6	14.7	5.4	
2.5	5.7	12.2	11.0	10.7	4.4	0.5 Lux min. (open)
4.0	8.0	17.0	15.8	17.5	6.5	
8.0	11.0	22.4	22.1	21.9	9.0	
10.0	9.2	23.0	22.6	22.3	7.1	
12.0	7.6	23.9	23.4	22.9	5.7	

ORDER CODES

Description

AV/HO/NM3	Non-Maintained 3-hour emergency bulkhead luminaire	
AV/HO/NM3/DALI	Non-Maintained 3-hour DALI emergency bulkhead luminaire	
AV/HO/230	Mains only bulkhead luminaire	
AV/HO/230D	DALI version of mains only bulkhead luminaire	
OPTIONS:	/BLE	Wireless DALI emergency
	AV/RB/KIT	Semi-Recessing Bezel

Emergency Lighting Products Limited
 Parbrook House, Gillmans Industrial Estate,
 Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601
 Fax: +44 (0) 1403 786602
 e-mail: sales@elp.uk.com

Safe in the knowledge
elp.uk.com